


# FORMAFLO 450Ø catchpit

PRODUCT INFORMATION - F5004



## INTRODUCTION

The Formaflo catchpit chamber is specially developed to sit within a Formavoid raft with a seamless membrane sealing detail to the F1201 collar. Supplied with a reducing cap accompanied with a compressible spacer.

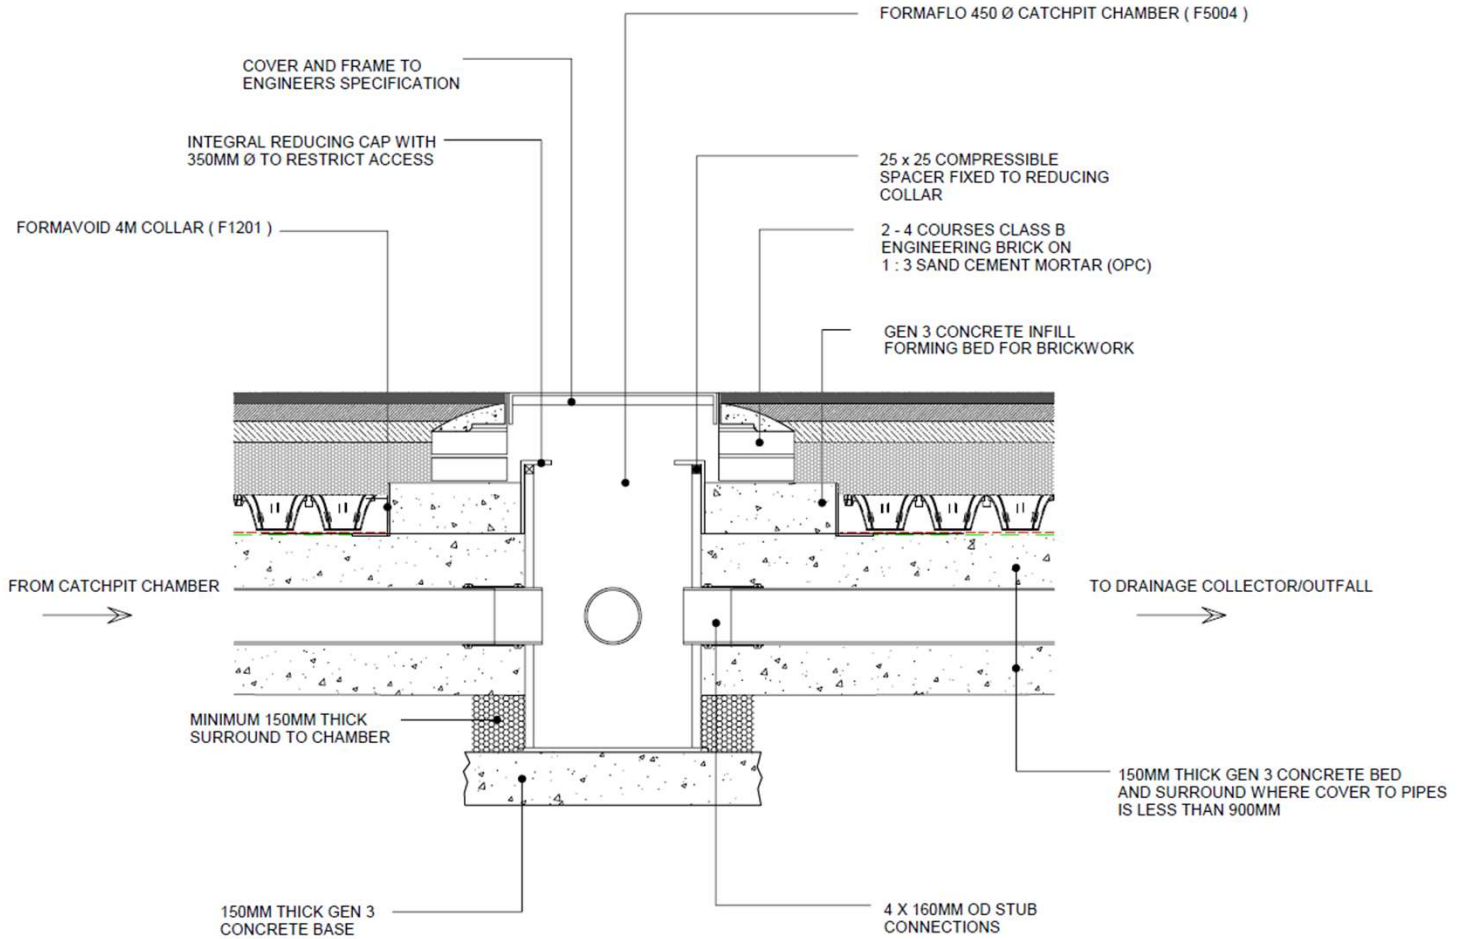

## FORMAFLO catchpit

Product Code	F5004
Material	High Density Polyethylene
Diameter	450mmØ
Depth	1500mm (cut down on site to required depth)
Sump Depth	300mm
Nr Connection Spigots	4
Connection Spigot Diameter	110mm to 160mm (to be specified)

# FORMAFLO 450Ø catchpit

PRODUCT INFORMATION – F5004



## MAINTENANCE

It is recommended to inspect Formaflo catchpit chambers at least every three months.

Appropriate removal/remedial action should be taken if an excess silts or debris are identified during inspection.

Further to the above, it is recommended to evacuate chambers every 12 months.

- ✓ Fully compatible with the standard range of Formaliner impermeable geomembrane liners.
- ✓ Compatible with Formavoid raft design.

Last Revised January 2025

SEL Environmental Ltd will not be held liable if our products are used in a manner inconsistent with our requirements, standards or the purposes indicated in the standards. This document does not give nor imply warranty for the intended use. This document may be modified without prior notice.